




MOTORIZED BALL VALVE 3-WAYS DIVERTER "T" TYPE

INSTRUCTION SHEET

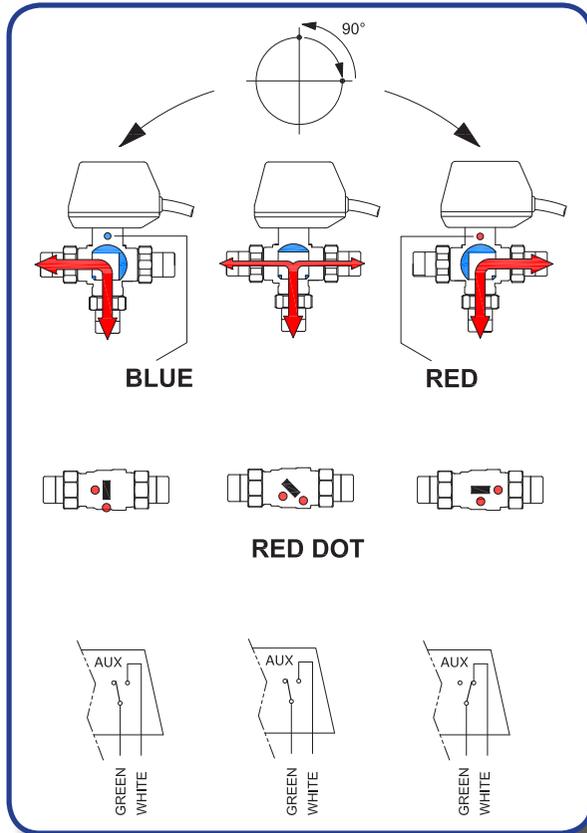

SUITABLE FOR WATER OR LIQUIDS COMPATIBLE WITH **PTFE** AND **EPDM**. BEFORE INSTALLATION, MAKE SURE THAT THE HYDRAULIC CIRCUIT IS CLEANED OF SOLIDS SUCH AS WELDING OR THREAD RESIDUES.



Environment temperature	min. 0 °C max 65 °C
Fluid temperature	min. 0 °C max 110 °C
Pressure rating	16 bar
Differential pressure	max 6 bar
Electrical protection	IP 54

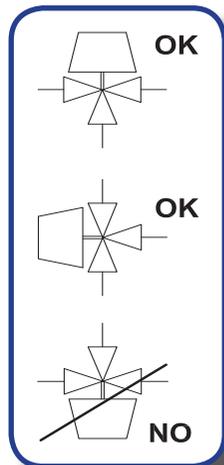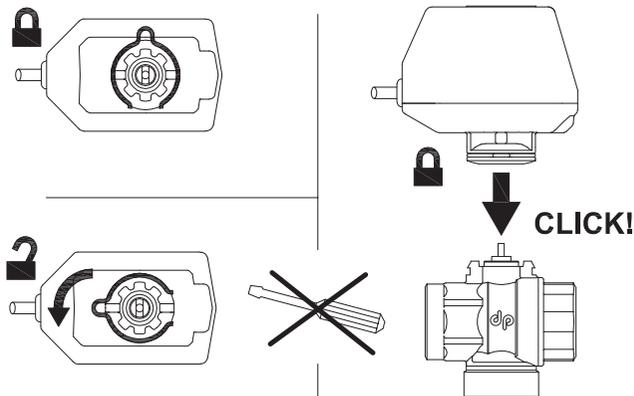


230 Vac	24 Vac
M7B3	M7C3
M7B3V	M7C3V
M7B3W	M7C3W
M7B3X	M7C3X

rot. time
60" x 90°
30" x 90°
15" x 90°
8" x 90°

230 Vac	24 Vac
M7A3	M7S3
M7A3V	M7S3V
M7A3W	M7S3W
M7A3X	M7S3X

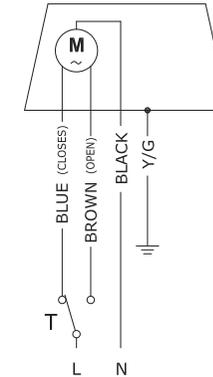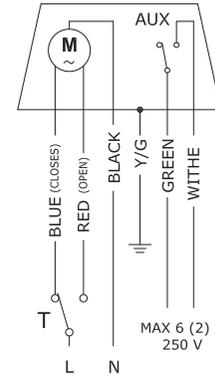

3-WIRES CONTROL M7(...)


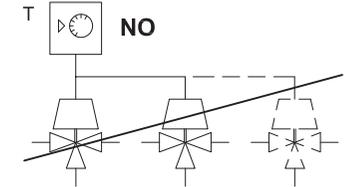


SEVERAL SERVOMOTORS WITH **3-WIRES CONTROL M7(...)** **CANNOT BE CONNECTED IN PARALLEL** TO A SINGLE THERMOSTAT/CONTROL.


230 Vac	24 Vac
R7B3	R7C3
R7B3V	R7C3V
R7B3W	R7C3W
R7B3X	R7C3X

rot. time
60" x 90°
30" x 90°
15" x 90°
8" x 90°

230 Vac	24 Vac
R7A3	R7S3
R7A3V	R7S3V
R7A3W	R7S3W
R7A3X	R7S3X

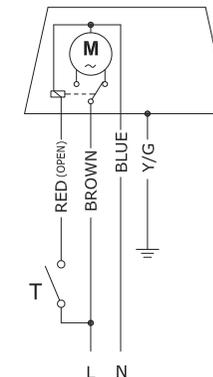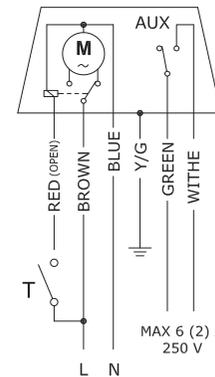

2-WIRES CONTROL R7(...)

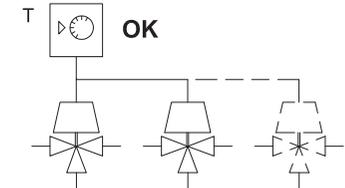

SEVERAL SERVOMOTORS WITH **2-WIRES CONTROL R7(...)** **CAN BE CONNECTED IN PARALLEL** TO A SINGLE THERMOSTAT/CONTROL.

The informations in this document are intended for the company responsible for installation and maintenance. The hydraulic and electrical installation operations must be carried out by qualified personnel, in accordance with the laws and regulations of each country where the product is destined. The product must only be used in the application context for which it has been designed. De Pala srl, in the continuous process of improving its products, reserves the right to make any technical, dimensional and aesthetic changes it deems necessary without prior notice.